

It is recommended that you keep your projector running with the latest firmware to benefit from improved features, applications and bugs. See below for details on how to update the firmware:

Bug fixes & improvements with Ver. B79:

Improve the stability of iPhone USB Power Delivery (USB PD) charging

How to upgrade USB-C firmware?

Required tools and materials

- (1) Laptop or Computer
- (2) USB-C to USB-C cable or USB-A to USB-C cable **(Ensure that the cable has a data transfer function.)**

To upgrade the firmware for USB-C, please proceed as follows:

The firmware upgrade takes approximately 1 minute to complete.

1. Turn off the projector. Unplug the power adapter and power cord.

2. At both ends, connect the USB-C cable to the USB-C port of the projector and the laptop/computer.


When using a USB-A to USB-C data cable, connect the USB-C cable to the USB-C port of the projector and the USB-A port of the laptop/computer.

3. Download the USB-C firmware from the BenQ website.


Unzip the file and double-click on it.





4. It will show below message.

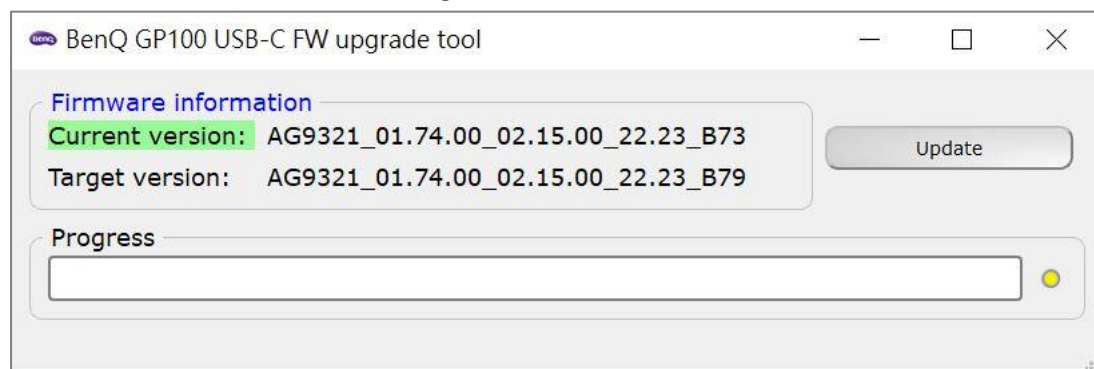


5. Click the button **Update** and **OK** to begin upgrading the firmware.

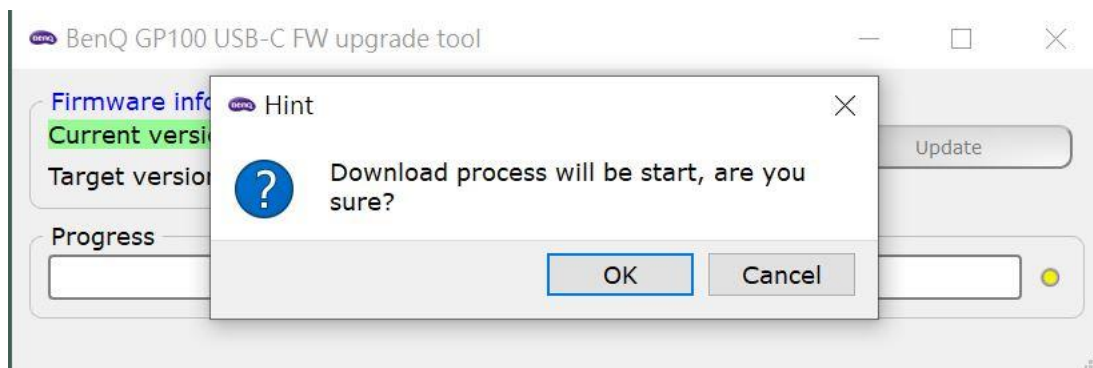


If the firmware version matches the version currently installed in the projector, a message will be displayed below.

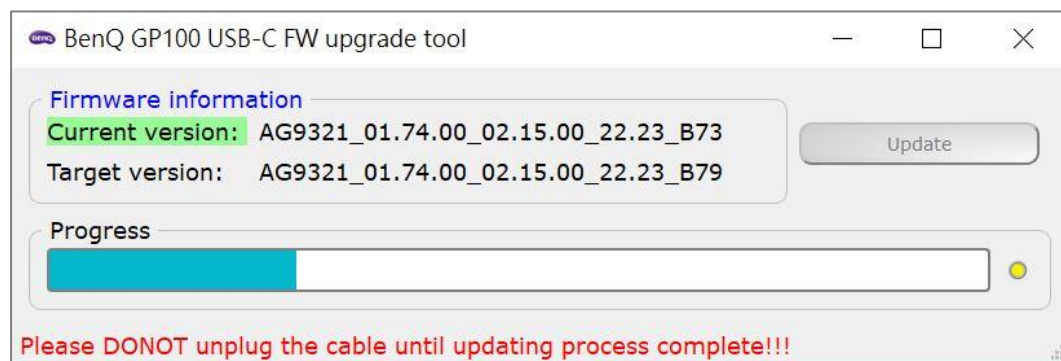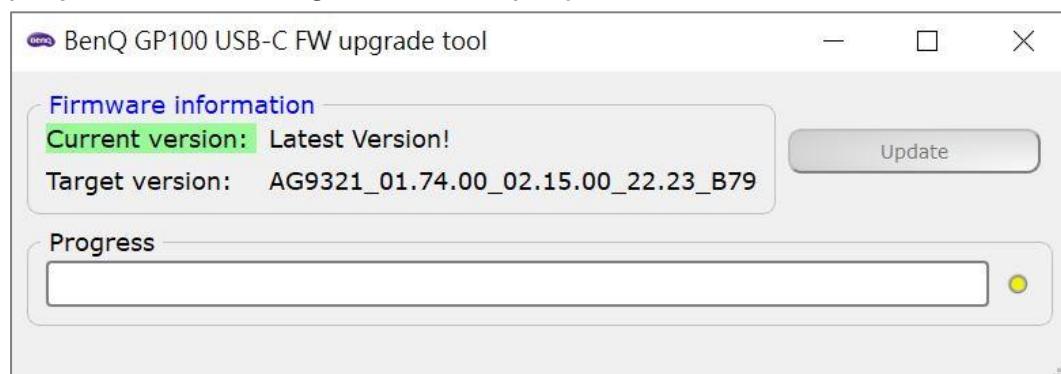

6. After the firmware update is complete, the message below will be displayed.

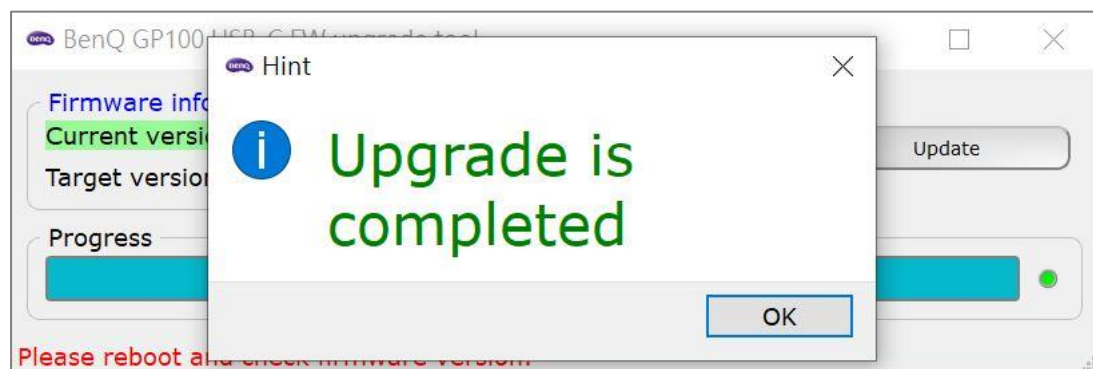

7. Reconnect the USB-C cable and double-click USB-C Firmware. The firmware version will be displayed.

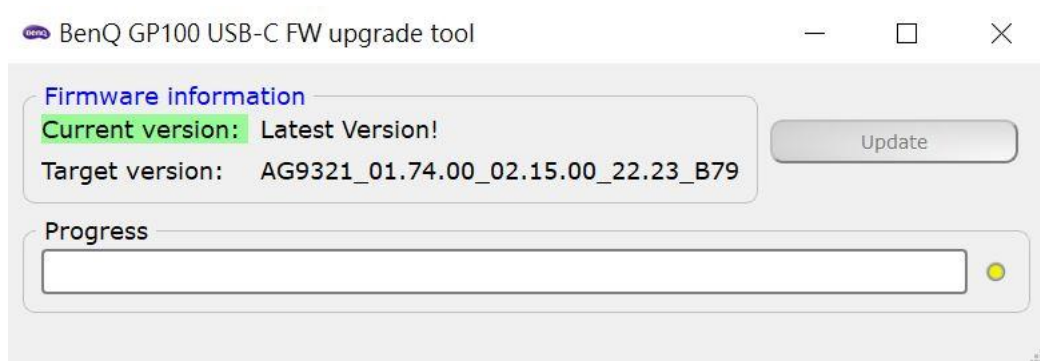

If there is further question, please contact our regional office:



--- Document Ends ---