

It is essential and recommended to keep your projector up-to-date with the latest system firmware. This allows you to take advantage of the latest features, application improvements, and bug fixes. For more details about system update instruction and improvements, please read through the following:

### **Bug and Feature Improvements with v01.00.38.00**

- Update battery meter program

### **Before System Update**

- Please make sure to plug in the AC power for a stable power supply

### **Things to Note for the System Update:**

- It would take few minutes to complete the sytem update
- Make sure to connect your projector to a stable AC power outlet before beginning the process. Do not use portable power sources or battery power
- Stay in the update screen and do not change screen while the process is ongoing

## Download and Upgrade System

The process to update the software varies. Follow the instructions accordingly.

Please follow the instruction below to update the projector firmware through USB pen drive


### STEP 1

Please download the system firmware from BenQ website

### STEP 2



Put the system firmware into a USB drive (FAT32 disk format required), then connect the USB-C pen drive to the USB-C port on GV1.

If the BenQ projector you have is GV1. if the BenQ projector you have is GS2, please connect the USB-A pen drive to the USB-A port on GS2.

<input type="checkbox"/> Name	Date modified	Type	Size
Compressed (zipped) Folder (1)			
 update_signed.zip	9/14/2021 12:05 AM	Compressed (zipped)...	538,626 KB



### STEP 3

Please go to **Settings** and select **About**

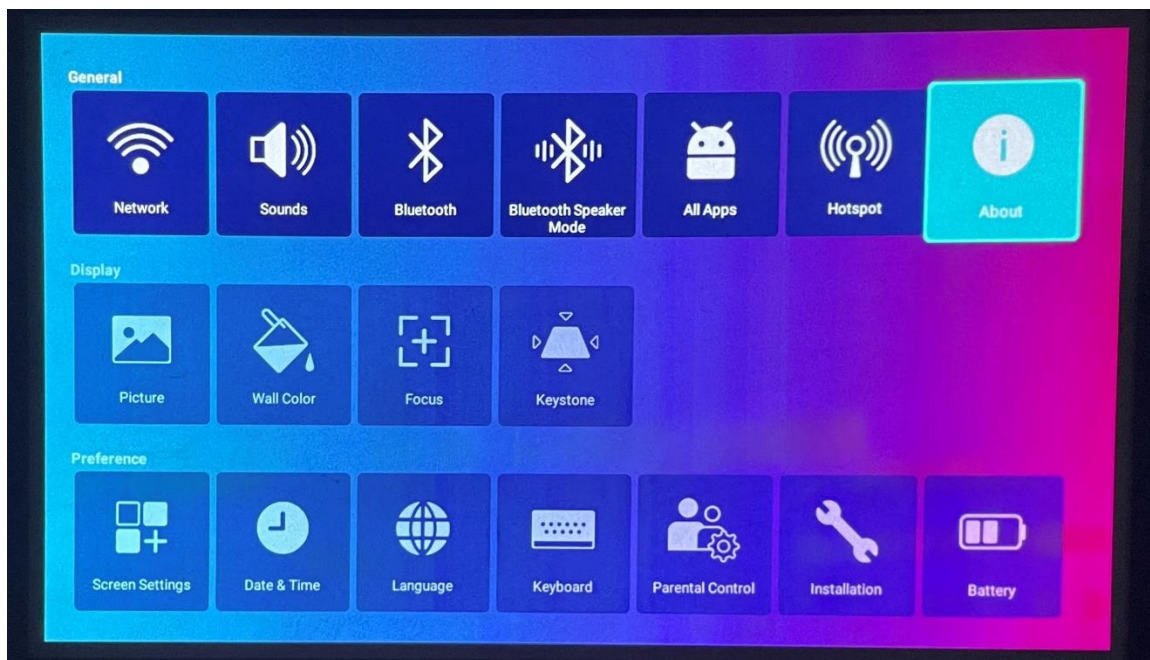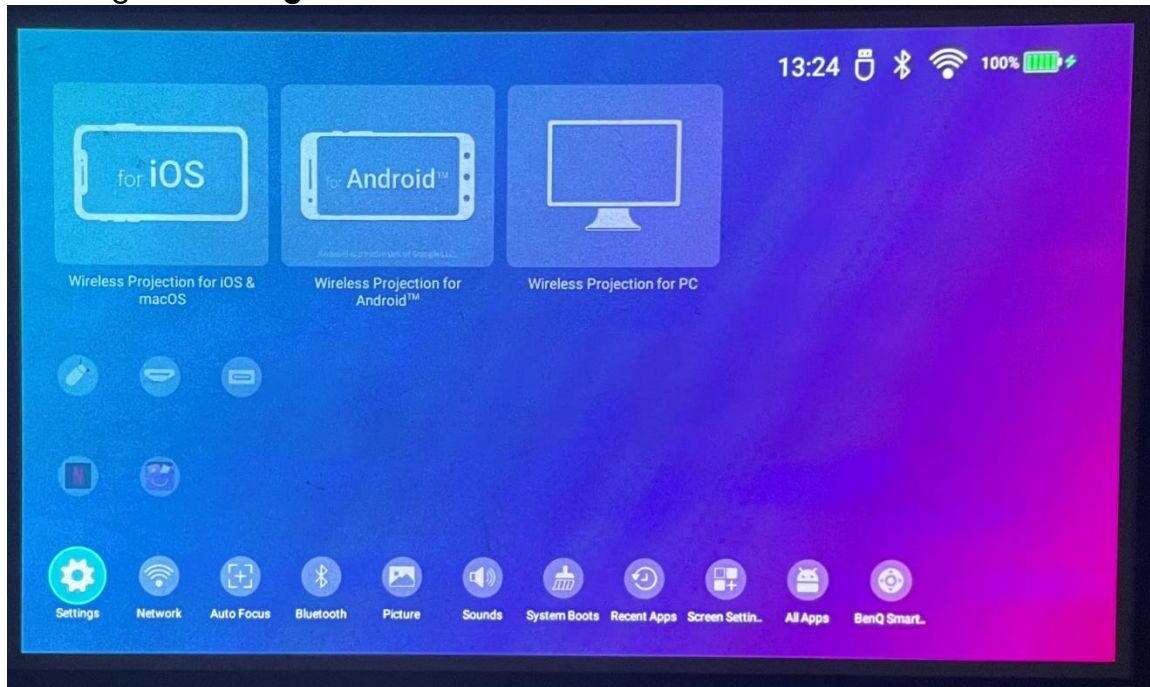

#### STEP 4



Select **System Update** and go to **USB Update**

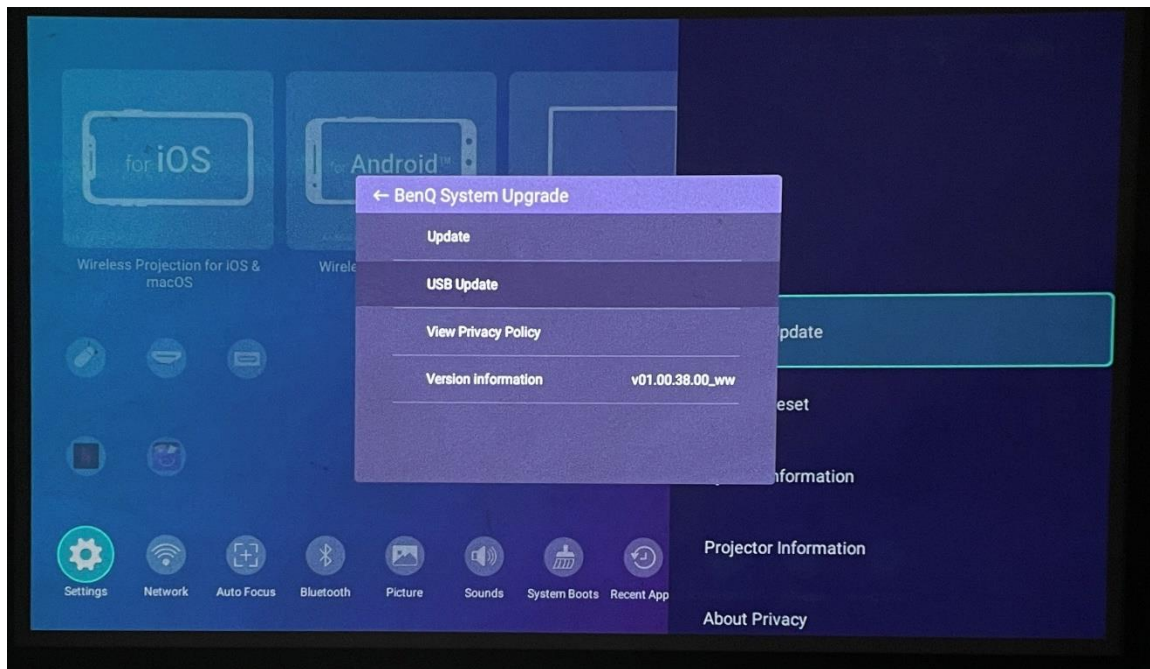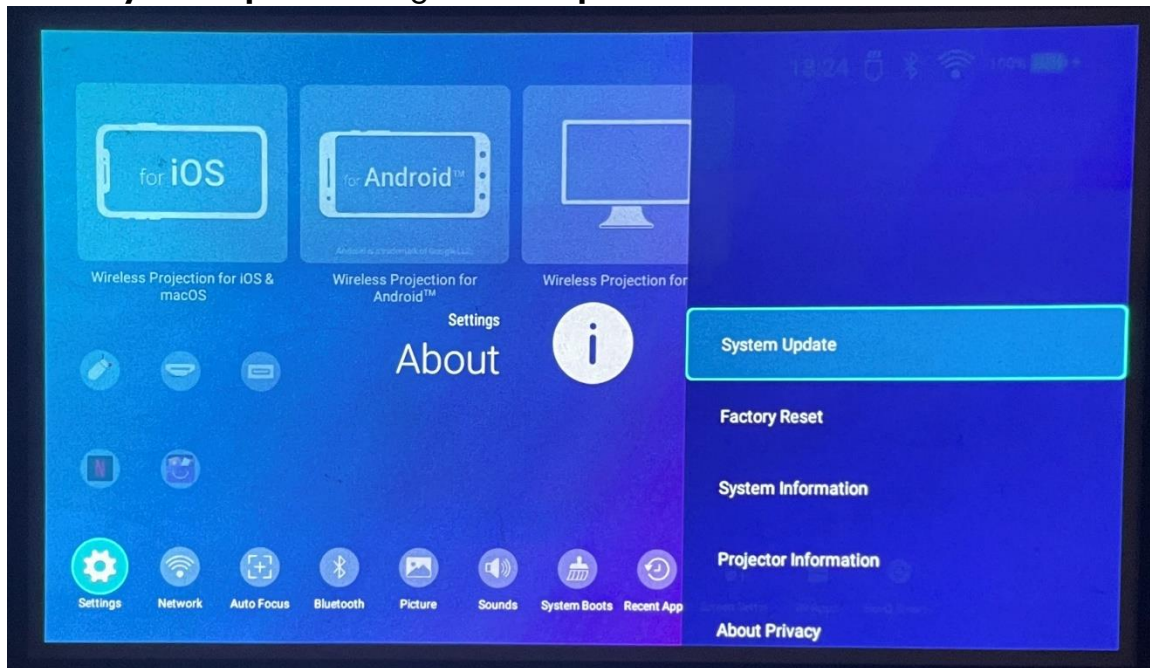





## STEP 5

Click **STAT UPDATE** and **UPDATE**

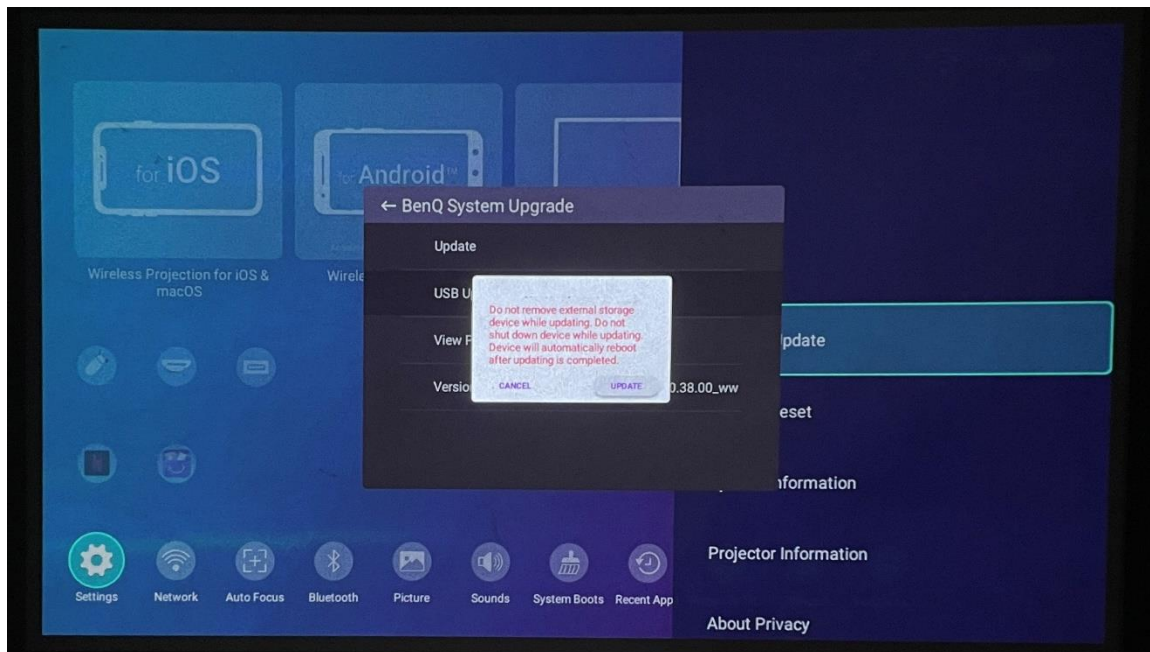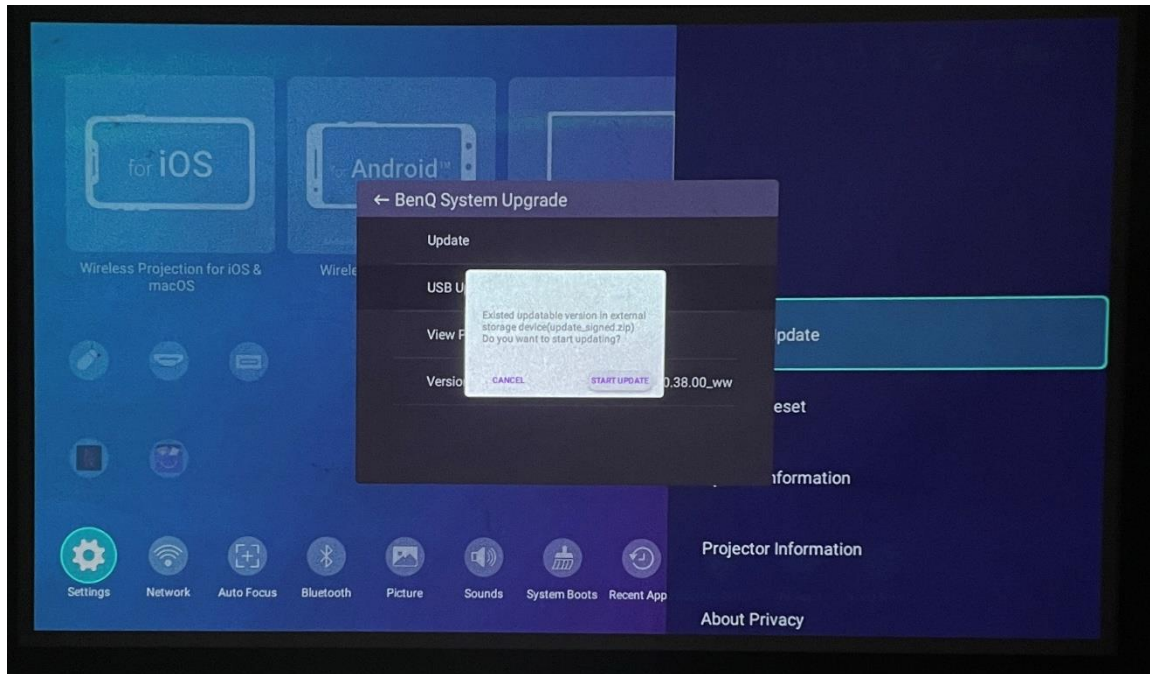

## STEP 6

System update in process. Projector will restart itself and get back to Home Screen once the update is complete.

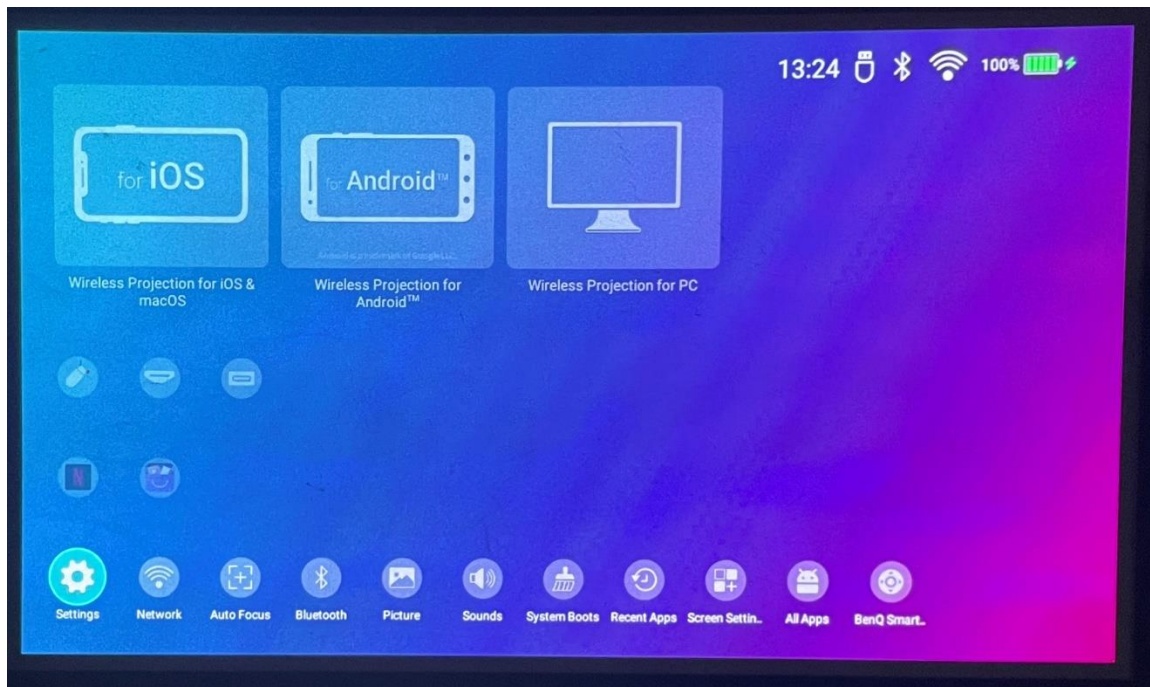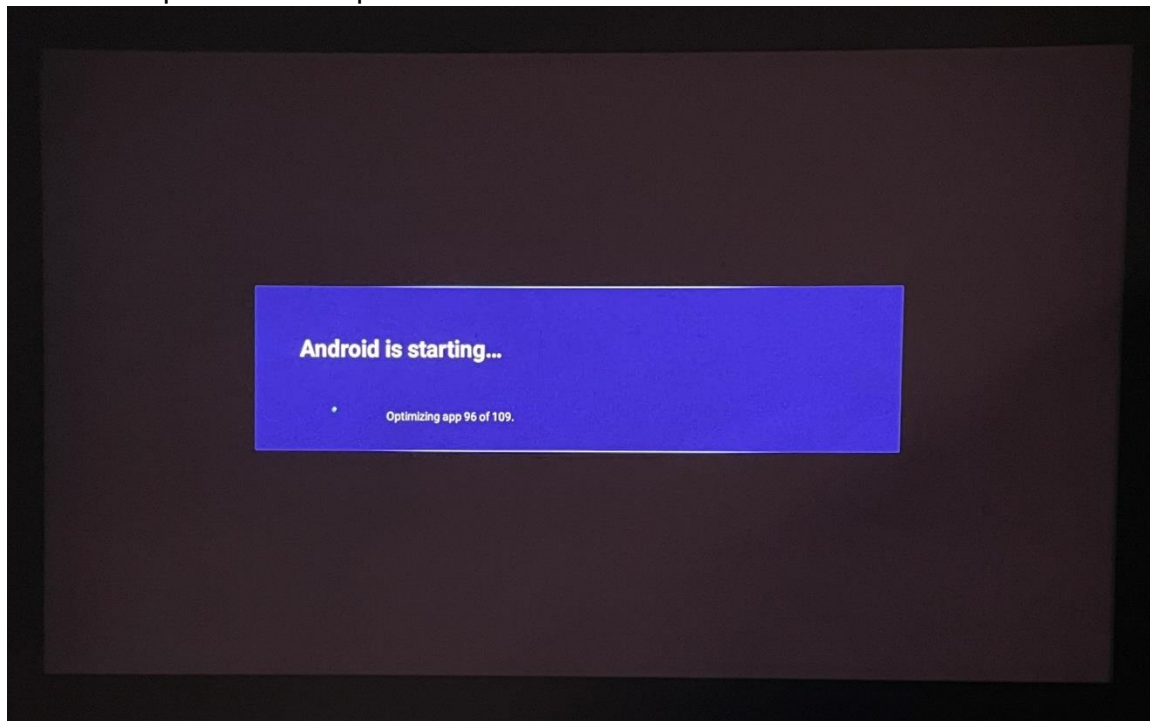

--- Document Ends ---